



SYSTEM MB-45

door and window system

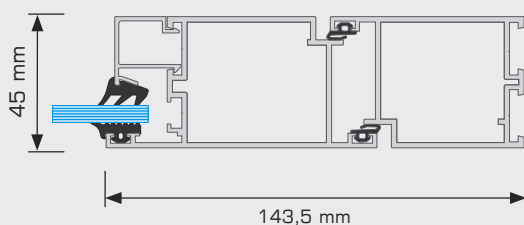

section of the door

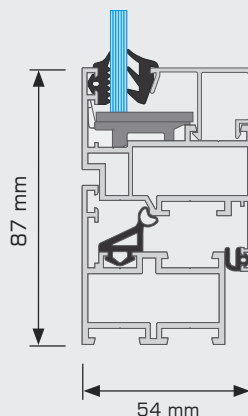

section of the window

Application

- constructions without a thermal barrier: various partitions, windows, doors, window displays, display cases, cashier boxes, etc.
- base for special solutions:
 - smoke-proof barriers MB-45D,
 - sliding and swing-action doors,
 - doors with clamp hinges MB-45S.

Construction

- basic depth of profiles 45 mm
- construction adjusted to EURO standard of hardware
- strips with falling gasket (in MB-45D)

Glazing

- glazing thickness ranging between 2 - 26 mm for fixed doors and windows and 2-35 mm for active windows

Tightness

- MB-45D – smoke-proof within the class S30 for doors and S60 for non-opening partitions

Functionality and design

- fixed or inward opening windows
 - tilt & turn
- single or double doors opening outward or inward, hand-operated or automatic sliding doors
- option of bending profiles to build arched windows

Technical approvals and certificates



www.aluprof.eu

Headquarters; The Bielsko-Biała Plant

ul. Warszawska 153, 43-300 Bielsko-Biała, Poland
tel. +48 33 81 95 300, fax +48 33 82 20 512

The Opole Plant

ul. Gostawicka 3, 45-446 Opole, Poland
tel. +48 77 40 00 000, fax +48 77 40 00 006

e-mail: aluprof@aluprof.eu

 **ALUPROF**
ALUMINIUM SYSTEMS